


400-AMP TEMPORARY POWER SKID

PRODUCT DEFINITION

The Temp Power Skid is a self-contained, skid-mounted temporary power distribution unit designed for construction sites, industrial facilities, and temporary installations requiring reliable 400-amp electrical service. This pre-engineered, factory-assembled solution provides 480V 3-phase and 120V single-phase power distribution in a rugged, portable package.

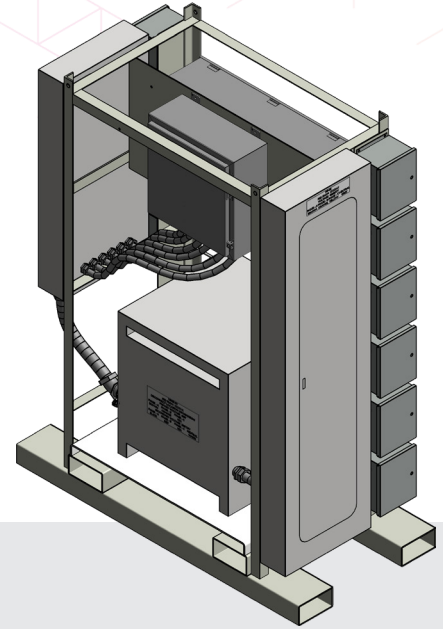

KEY FEATURES

- ✓ Fork pockets & lifting eyes for easy transport
- ✓ Breaker locks on every branch circuit
- ✓ Junction boxes for common high amperage loads
- ✓ Built in ladders for cord & cable management
- ✓ Design to fit through a standard doorway
- ✓ Plug & play ready

TECHNICAL SPECIFICATIONS

Electrical	
Input Voltage	480Y/277V, 3-Phase, 4-Wire + Ground
Main Breaker	400A, 3-Pole, 65kAIC @ 480V
Transformer	50kVA, 480V Primary to 120/240V Secondary, Dry Type
Output - 480V Panel (HP-02)	1x 150A/3P, 4x 100A/3P, 2x 80A/3P, 2x 60A/3P, 12x 20A/1P
Output - 120V Panel (RP-02)	225A Main, 2x 100A/2P, 2x 80A/2P, 6x 50A/2P, 2x 30A/2P, 18x 20A/1P
Convenience Receptacles	14x 20A 120V GFCI Duplex (NEMA 5-20R), 2x 50A 240V (NEMA 14-50R)
Mechanical	
Dimensions (L x W x H)	66" x 32" x 83" (168 x 81 x 211 cm)
Weight (Approximate)	2,500 lbs (1,134 kg)
Enclosure Rating	NEMA 3R (Outdoor, Rain-Tight)
Frame Construction	Heavy-duty steel with fork pockets and lifting eyes
Finish	Powder-coated safety yellow or custom color

STANDARDS & CERTIFICATIONS

UL 508A Industrial Control Panel | NEC Article 590 Compliant (Temporary Installations) | OSHA Construction Electrical Safety Standards
NEMA 3R Enclosure Rating